BUILT-IN BREATHING SYSTEM BACK PRESSURE REGULATOR



• Gas Liquid

DiaphragmPiston

Self-Venting

Non-Venting

Max Rating: 50 bar (725 psi)

Control Range: 30 bar (435 psi)

Cv 2.0



INTRODUCING THE BIBS100...

The BIBS100 is a negative-biased, dome-loaded back pressure regulator for gas applications. It offers fine adjustment of the bias spring for enhanced process control.

Its balanced main valve design minimises load on the seat and provides stable pressure control. In addition, servicing is simplified with easy access to the seat cartridge from the base of the regulator.

SPECIFICATION

Max. Rating	50 bar (725 psi)
Control Range	Up to 30 bar (435 psi) Bias
Design Proof Pressure	150% max. working pressure
Bias Spring	Up to 3 bar (45 psi)
Seat Leakage	In accordance with ANSI/FCI 70-3
Weight	6.5kg (14.3lbs)

STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Pady and Pannat	AISI 316 / 316L Stainless Steel
Body and Bonnet	(UNS S31600 / S31603) or Brass
Main Valve Pin	AISI 316 / 316L Stainless Steel
iviairi vaive Pin	(UNS S31600 / S31603) or Brass
Soft Seat	PCTFE
Value Caring	AISI 302 S26 Stainless Steel
Valve Spring	(UNS S30100)
Diaphragm	FKM / FPM
'O'-Ring Seals	FKM / FPM
Coming or	AISI 316 / 316L Stainless Steel
Spring	(UNS S31600 / S31603)

FEATURES AND BENEFITS

LARGE SENSITIVE 1 ELASTOMERIC DIAPHRAGM

> Provides accurate pressure regulation.

2 SEAT CARTRIDGE EASY ACCESS TO

> Simplified servicing through base of regulator.

FINE ADJUSTMENT OF BIAS SPRING

> Enhanced control of process and set-up.

4 CV 2.0

Supports applications with a large flow.

NOTE: Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E info@pressure-tech.com

W www.pressure-tech.com



BUILT-IN BREATHING SYSTEM BACK PRESSURE REGULATOR



• Gas Liquid

Diaphragm Piston

Self-Venting

Non-Venting


Max Rating: 50 bar (725 psi)

Control Range: 30 bar (435 psi)

Cv 2.0

DRAWINGS AND INSTALLATION DIMENSIONS

Dimensions shown for 3/4" NPT option - please contact the office for additional connections options.

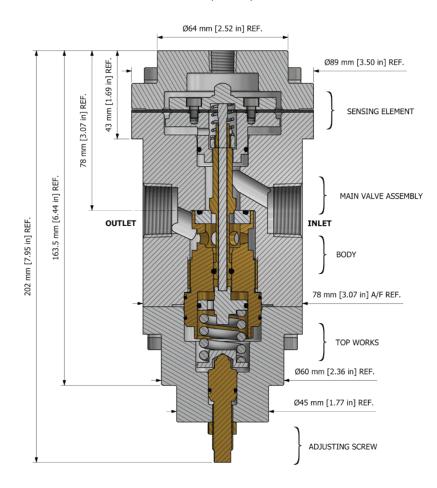



Note:

All gauge ports are 1/4" NPT as standard.

NOTE: Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





T +44 (0)1457 899 307

E info@pressure-tech.com

W www.pressure-tech.com



BUILT-IN BREATHING SYSTEM BACK PRESSURE REGULATOR



• Gas Liquid

Diaphragm Piston

Self-Venting

Non-Venting

Max Rating: 50 bar (725 psi)


Control Range: 30 bar (435 psi)

Cv 2.0

FLOW CURVE

Please contact the office for further information.

PORTING CONFIGURATIONS



NOTE: Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK



BUILT-IN BREATHING SYSTEM BACK PRESSURE REGULATOR





• Diaphragm • Piston



Non-Venting


Max Rating: 50 bar (725 psi)

Control Range: 30 bar (435 psi)

Cv 2.0

ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

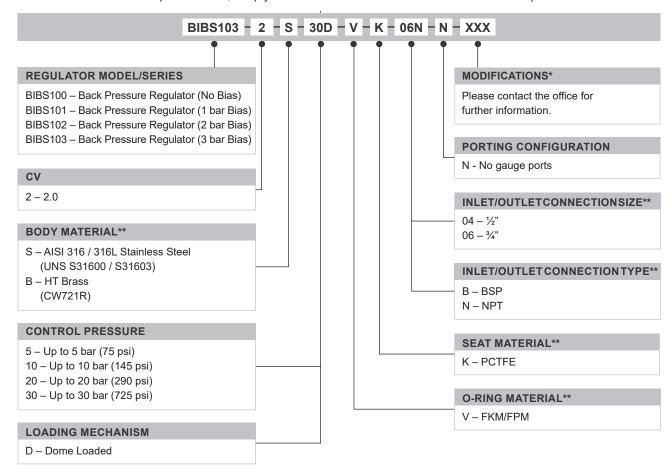

	PART NUMBER	DESCRIPTION	
Service Kit	SRK-BIBS100	Various options available	
Panel Mounting Ring	PT-C-024	-	

NOTE: Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements





PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E info@pressure-tech.com

W www.pressure-tech.com



^{*} Where applicable

^{**} Other materials may be available - please contact the office