

# Locking Handles for Plug Valves

## Features

Lever locks to plate to secure valve open or closed.

- Fits 1/4 in. (P4T series) and 1/2 in. (P6T series) plug valves.
- Meets OSHA Lockout/Tagout Standard 29 CFR Part 1910.147, *Control of Hazardous Energy*.
- Accommodates padlock shackle length of 3/4 in. (19 mm) minimum and diameter of 1/4 to 3/8 in. (6.4 to 9.5 mm).

## Materials

Handle, coupling, cap: Nylon.

Handle insert: Brass.

Lever: 316 SS/ASTM A167.


Plate, mounting bracket: 316 SS/ASTM A240.

Screws: Stainless steel.

All other components: See the *Swagelok Plug Valves* catalog.

## Dimensions and Ordering Information

Dimensions are for reference only and are subject to change.

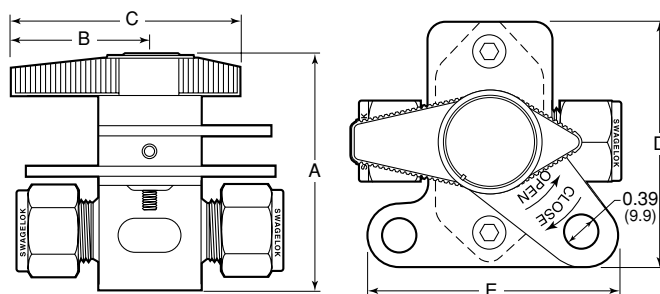

Series	Dimensions, in. (mm)				
	A	B	C	D	E
P4T	2.07 (52.9)	1.14 (29.0)	1.88 (47.8)	2.32 (58.9)	2.24 (56.9)
P6T	2.57 (65.3)	1.50 (38.1)	2.48 (63.0)	2.70 (68.6)	2.69 (68.4)

### Safe Product Selection

When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user.

**Caution: Do not mix or interchange parts with those of other manufacturers.**



## Factory-Assembled Valves

To order a plug valve with a locking handle, add **-LD** to the valve ordering number obtained from the *Swagelok Plug Valves* catalog.

Example: SS-2P4T-LD

The standard handle color is green. For an optional color, add a handle color designator.

Example: SS-2P4T-LD-BK

Handle Color	Designator
Black	-BK
Blue	-BL
Red	-RD

## Locking Handle Kits

Kits include plug subassembly (plug, coupling, handle, pin, screw, cap, and O-rings), lock lever, lock plate, mounting bracket and screws, retaining ring, and instructions.

Select a kit ordering number. For an optional color, replace **GR** in the kit ordering number with a handle color designator.

Valve Material	Kit Ordering Numbers	
	P4T Series	P6T Series
Brass	B-5LDK-P4T-GR	B-5LDK-P6T-GR
Stainless steel	SS-5LDK-P4T-GR	SS-5LDK-P6T-GR

Example: B-5LDK-P4T-BK